




LPG HOSE





LIQUEFIED PETROLEUM GAS HOSE

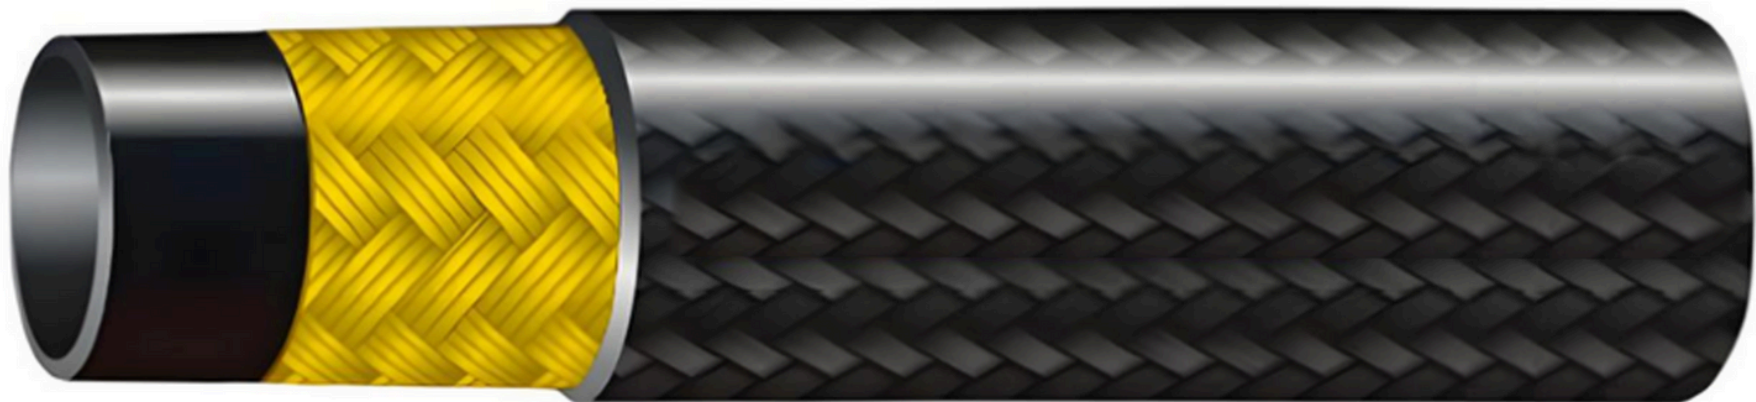


Inner rube: Seamless oil-resistant synthetic rubber tube
Reinforcement: Singer layer of steel wire braid
Cover: Black high-temperature resistant impregnated textile braid
Application: Gaseous or liquid propane, butane, or any combination of these two mixtures. Max.W.P. 350 psi. Complies with UL21 standard.

Part No.	Metric Size (mm)	Inch Size	Inside Diameter (I.D.) mm	Outside Diameter (O.D.) mm	Maximum Working Pressure (psi)	Minimum Burst Pressure (psi)	Minimum Bend Radius (mm)	Weight (kg/m)
LPG-05	8	5/16	7,9	17	350	1750	90	0

- LPG HOSES
- FITTINGS & ADAPTERS

LIQUEFIED PETROLEUM GAS HOSE

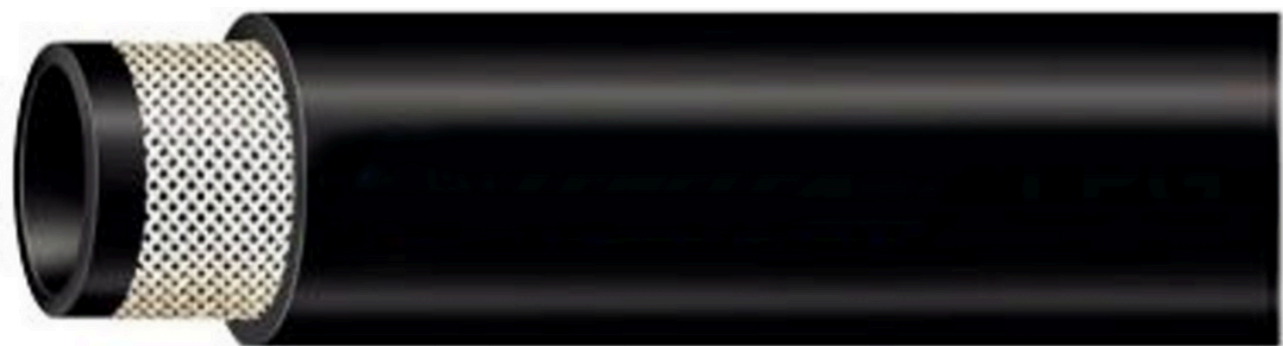

SMOOTH SURFACE




WRAPPED SURFACE

Inner tube: Seamless oil-resistant Synthetic rubber
Reinforcement: Single synthetic fiber braided layer
Cover: Weather-resistant, breathable synthetic rubber
Application: Used for loading and unloading of tank trucks, as well as various applications in natural gas and industrial production. Complies with UL21 standard.
Temperature: -40°C ~ +66°C (-40°F ~ +150°F)
Advantages: Low permeability (75% lower than the standard , 55% lower than the competition). Longer lasting cover. Secure assembly with the connection. No sealant required. Exceeds UL-21 requirements. Will not collapse.

Part No.	Metric Size (mm)	Inch Size (in)	Inner Diameter I.D (mm)	Outer Diameter O.D (mm)	Max Working Pressure (Psi)	Max Working Pressure (MPa)	Suction (In Hg)	Suction (mm Hg)	Min Bend Radius (in)	Min Bend Radius (mm)	Weight (Lb/Ft)	Weight (Kg/m)	Length (m)
LPG-12S	19	3/4.	19	32	350	2.413	20	508	6	152	0,45	0,677	61
LPG-16S	25	1	25	38	350	2.413	10	254	8	203	0,53	0,791	46
LPG-20W	32	1 1/4	32	49	350	2.413	10	254	10	254	0,99	1,48	40
LPG-24W	38	1 1/2	38	55	350	2.413	10	254	12	305	1,12	1,67	40
LPG-32W	51	2	51	69	350	2.413	10	254	16	406	1,56	2,32	40


Note: Inch sizes of 3/4 "and 1" are smooth surface, while 1 "1/4 to 2" are wrapped surface.

REUSABLE CONNECTIONS FOR LPG HOSES (SWIVEL FEMALE CONNECTOR WITHSAE90° SEAT)

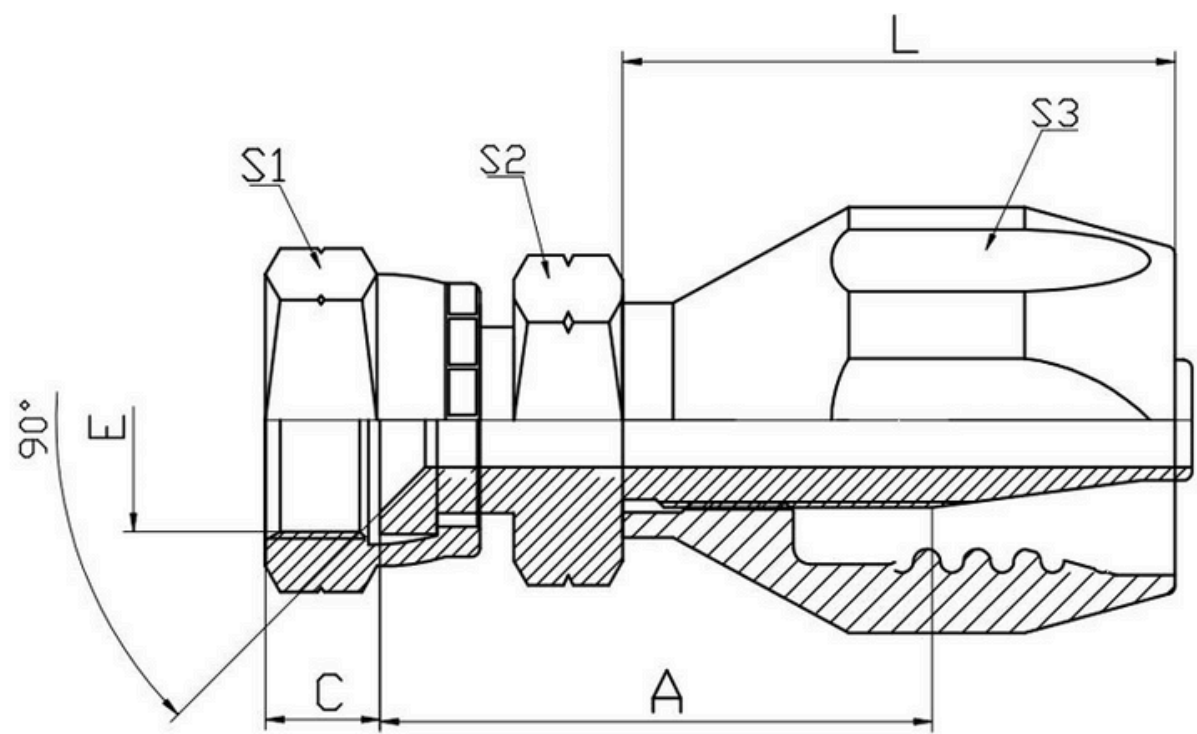

27818D-06-06 R5
SAE FEMALE 90° CONE SEAT

THREAD E	HOSE DASH	DIMENSIONS					
		A (mm)	C (mm)	L (mm)	S1 (mm)	S2 (mm)	S3 (mm)
U5/8×18"	6	35,5	10,8	33	19	19	20,64

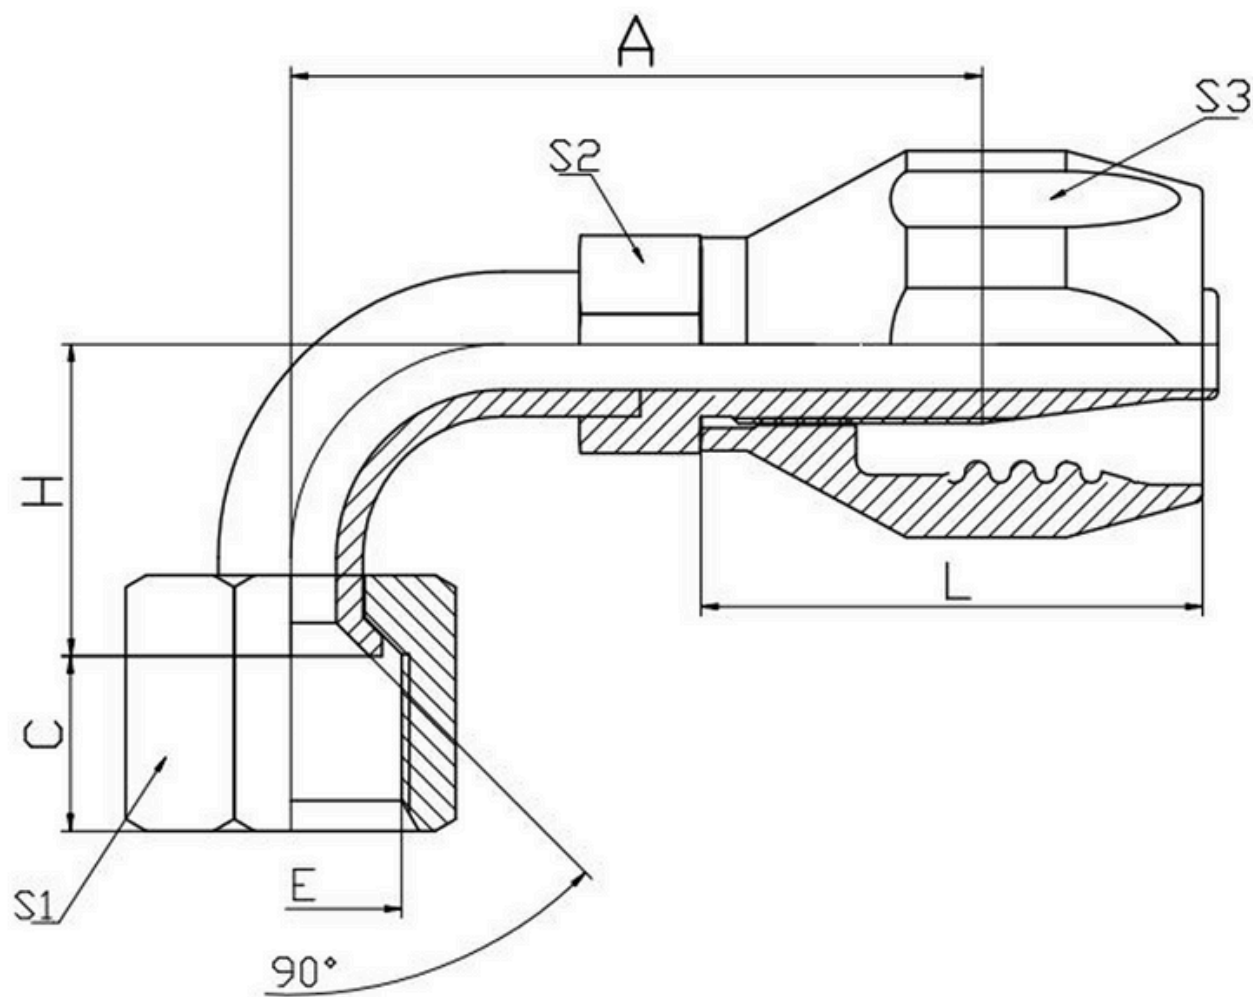

27898D-06-06 R5
90° SAE FEMALE 90° CONE SEAT

THREAD E	HOSE DASH	DIMENSIONS					
		A (mm)	C (mm)	L (mm)	S1 (mm)	S2 (mm)	S3 (mm)
U5/8X18"	6	45,5	11,5	33	19	12,7	20,64